



# Furon® Large Check Valve



## Media Actuated Molded, (1/2" & 3/4" Orifice)

### Description

Furon Large Check Valves are injection molded high-purity valves which allow fluids to pass in only one direction, preventing back flow. Available in 1/2" and 3/4" orifice sizes, our Large Check Valves feature 100% metal-free and elastomer-free construction and high purity PFA wetted flow path. Compact design allows for easy inline installation. Furon Large-Check Valves are engineered for use in fluid temperatures up to 250 °F (121 °C) and operating pressures up to 120 PSIG (8.3 bar).

### Applications

- To prevent drain-down of chemical delivery lines
- To prevent backflow in process delivery
- Transfer of aggressive or ultrapure chemicals commonly used in the Semiconductor and Chemical Processing industries

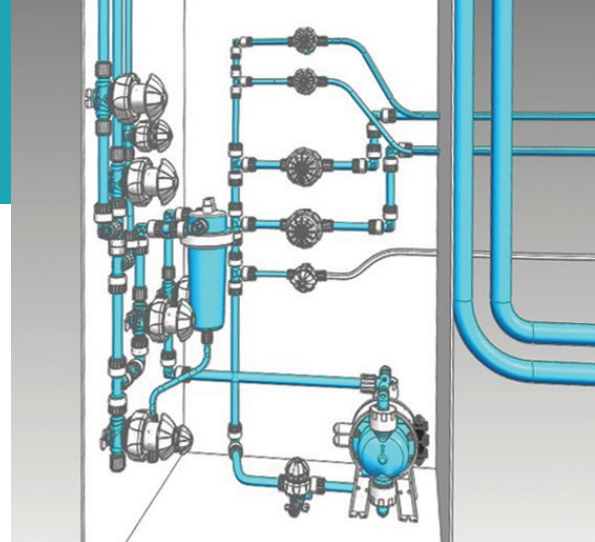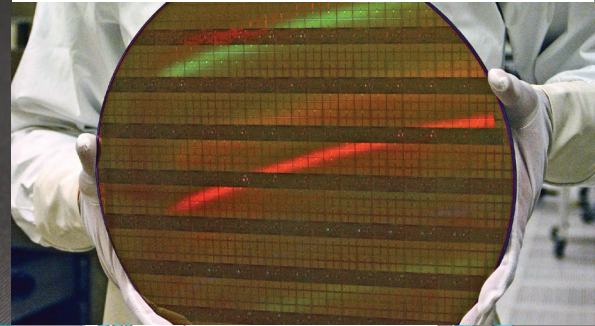

### Features and Benefits

- 100% high-purity PFA construction
- Metal and O-Ring free design
- <1 PSIG (0.07 bar) cracking pressure
- Zero dead volume body seal with no wetted thread areas
- 250° F (121° C) maximum temperature rating
- High-purity PFA spring

ASK AN ENGINEER

## Furon Large Check Valve


Description	End Connection	Orifice (in.)	Port Size (in.)	A (in.)	ØB (in.)
LCVMF-88	FlareGrip® II	1/2	1/2	4.40" (111.76 mm)	1.72" (43.69 mm)
LCVMF-1212	FlareGrip® II	3/4	3/4	4.60" (116.84 mm)	2.20" (55.88 mm)
LCVMF-1216	FlareGrip® II	3/4	1	4.70" (119.38 mm)	2.20" (55.88 mm)
LCVM7-88	FuseBond™	1/2	1/2	4.35" (110.49 mm)	1.72" (43.69 mm)
LCVM7-1212	FuseBond™	3/4	3/4	4.20" (106.68 mm)	2.20" (55.88 mm)
LCVM7-1216	FuseBond™	3/4	1	4.20" (106.68 mm)	2.20" (55.88 mm)

## Ordering & Technical Specifications


Operating Pressure	150 psig (10.3 bar)
Back Pressure	150 psig (10.3 bar)
Cracking Pressure	<1 psig (0.07 bar)
C <sub>v</sub> Flow Factor	3.7 - 7.5
Max. Operating Temperature	250°F (121°C)
Body	PFA
Spring	PFA

## Standard Options

- Other end connections not listed.  
[Please consult factory](#) for details >>
- Add a -3 for PFA nut on Flare configuration

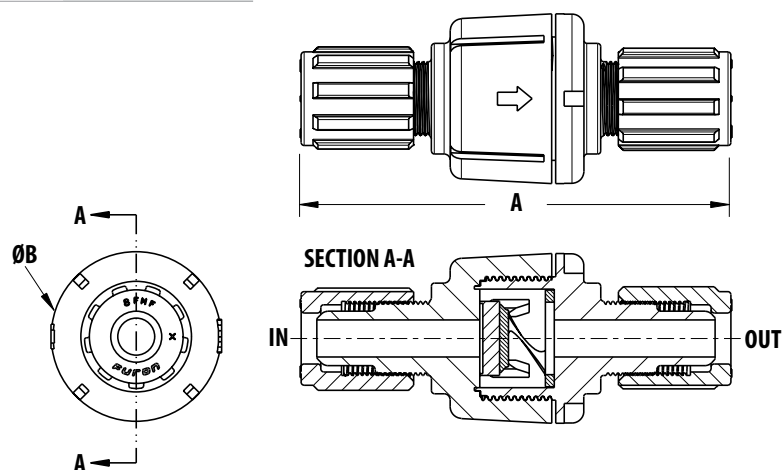

## Inlet Pressure vs Flow\*\*

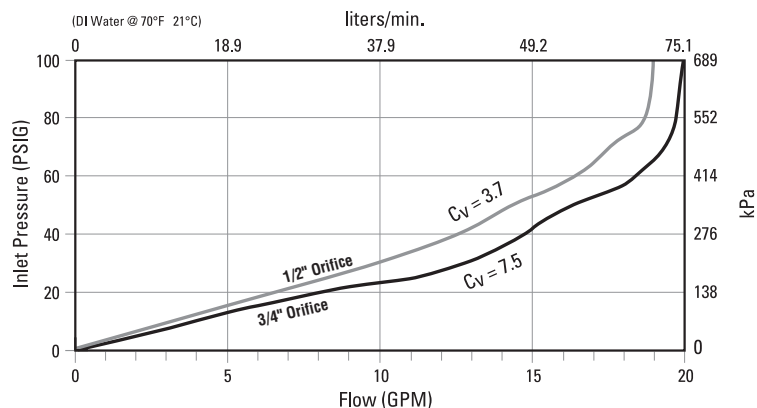

**Saint-Gobain Performance Plastics**  
 7301 Orangewood Avenue  
 Garden Grove, CA 92841  
 1-800-833-5661  
 Tel: (714) 630-5818  
 Fax: (714) 688-2614

www.processsystems.saint-gobain.com

**NOTE:** The data and details given in this document are correct and up to date. This document is intended to provide information about the product and possible applications. This document is not the product specification and does not provide specific features, nor does it guarantee product performance in specific applications. Saint-Gobain cannot anticipate or control the conditions of the field and for this reason strongly recommends that practical tests are conducted to ensure that the product meets the requirements of a specific application.

Furon®, FlareGrip® and FuseBond™ are registered trademarks of Saint-Gobain Performance Plastics. Super 300® is a registered trademark of Nippon Pillar Packaging Co. LTD.

**IMPORTANT:** It is the user's responsibility to ensure the suitability and safety of Saint-Gobain Performance Plastics products for all intended uses and that the components to be used comply with all applicable regulatory requirements. Saint-Gobain Performance Plastics assumes no responsibility for any product failures that occur due to misuse arising out of the design, fabrication or application of the products into which they are incorporated.

**WARRANTY:** For a period of 12 months from the date of first sale, Saint-Gobain Performance Plastics warrants this product to be free of defects in materials and workmanship. The only obligation under any applicable product warranty will be to replace any portion proving defective, or at our option, to refund the purchase price thereof. THIS IS THE EXCLUSIVE WARRANTY AND IS EXPRESSLY IN LIEU OF ANY AND ALL OTHER OBLIGATIONS, GUARANTEES, WARRANTIES AND REPRESENTATIONS. SAINT-GOBAIN PERFORMANCE PLASTICS DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.