

Conductive Conductivity Measuring Cells

ACS-Z COMPACT-LINE



- Conductive measuring system (two-electrode system)
- Measuring range:
0.05 ... 10 $\mu\text{S/cm}$
($K=0.01 \text{ 1/cm}$)
1 ... 1000 $\mu\text{S/cm}$
($K=0.1 \text{ 1/cm}$)
10 $\mu\text{S/cm}$... 15 mS/cm
($K=1.0 \text{ 1/cm}$)
- Body material PVDF
- G $\frac{3}{4}$ A BSP thread
- Rated pressure to 16 bar (at +25°C)
- Thermostability up to 135°C
- Electrode material stainless steel 1.4571 (at $K=1.0 \text{ 1/cm}$ graphite)
- Integrated temperature sensor Pt 100



KOBOLD companies worldwide:

ARGENTINA, AUSTRALIA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHILE, CHINA, COLOMBIA, CZECHIA, EGYPT, FRANCE, GERMANY, GREAT BRITAIN, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, NETHERLANDS, PERU, POLAND, REPUBLIC OF KOREA, ROMANIA, SINGAPORE, SPAIN, SWITZERLAND, TAIWAN, THAILAND, TUNISIA, TURKEY, USA, VIETNAM

KOBOLD Messring GmbH
Nordring 22-24
D-65719 Hofheim/Ts.
Head Office:
+49(0)6192 299-0
+49(0)6192 23398
info.de@kobold.com
www.kobold.com

Description

The conductivity measuring cells are used with transducer model ACS-Z. The cells comprise a screw-in body made of plastic (PVDF) and electrodes embedded in this body. A temperature sensor Pt100 for temperature detection and compensation is also integrated. The electrodes are manufactured from Stainless Steel or special graphite and are delivered with different cell constants and thus various measuring ranges. The electrical connection of the cells is carried out with plug connections.

Typical Applications

K = 0.01 / K = 0.1

Pure and ultra-pure water, pharmaceutical industry, chemical industry, foodstuff technology, chip manufacture, ion exchanger plants and reverse osmosis plants.


K = 1.0

- Media separation
- Drinking water purification
- Wastewater checks/treatment

Dimensions

Cell constant

K = 0.01; K = 0.1 1/cm

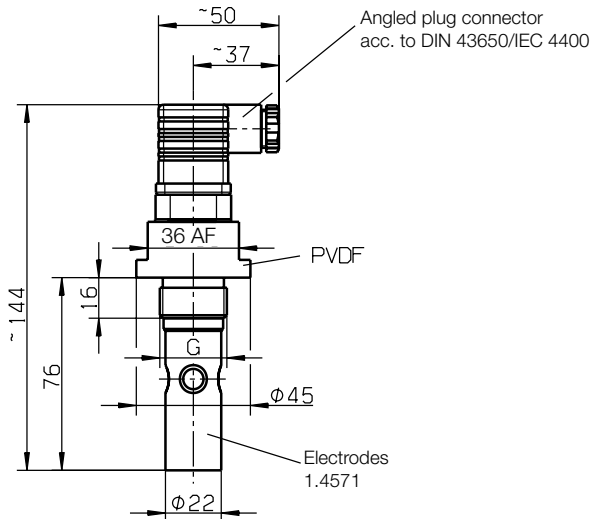

Technical Details

Measuring ranges:

- 1: 0.05... 10 µS/cm (K = 0.01 1/cm)
- 2: 1 ... 1000 µS/cm (K = 0.1 1/cm)
- 3: 10 µS/cm... 15 mS/cm (K = 1.0 1/cm)

Measuring surfaces:

- stainless steel 1.4571 for measuring ranges 1 and 2
- special graphite for measuring range 3

Body material:

PVDF (Polyvinylidenfluoride)

Thermostability:

135 °C (at 1 bar)

Rated pressure:

16 bar (at 25 °C)

Linear dependence of pressure and temperature

Screw-in thread:

G ¾ A

Temperature sensor:


Pt 100 integrated

Thermostability of cable ACK-Z:

-5...+80 °C

Cell constant

K = 1.0 1/cm

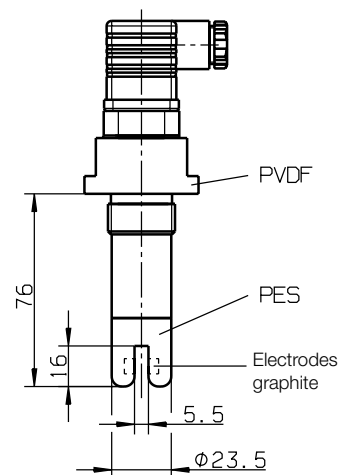

Order Details Measuring Cell (Example: ACS-Z 1 T 1 G)

| Model | Measuring range | Temperature sensor | Electrical connection | Process connection |
|-------|---|--------------------|----------------------------------|---------------------|
| ACS-Z | 1 = measuring range 1: 0.05... 10 µS/cm (K = 0.01 1/cm) 2 = measuring range 2: 1 ... 1000 µS/cm (K = 0.1 1/cm) 3 = measuring range 3: 10 µS/cm... 15 mS/cm (K = 1.0 1/cm) | T = with Pt 100 | 1 = 1 plug and socket connection | G = thread G ¾ A |

Order Details Cable

| Model | Length |
|-------|---|
| ACK-Z | 05 = 5 m 10 = 10 m 15 = 15 m 20 = 20 m 25 = 25 m |