

GO REGULATOR

CYL-1 Series

Single Stage Brass Cylinder; Gas Pressure Reducing Regulator



(Shown with optional outlet valve)

The CYL-1 Series is designed as a complete compact pressure control module. The basis of this unit is the economical PR-2 Series pressure control valve which is widely used in instrumentation sample systems as well as many other applications requiring maximum reliability. This regulator, when ordered with appropriate gauges and CGA inlet fitting, is designed for use as a compressed gas cylinder regulator for those applications where the corrosion resistance of stainless steel is not a requirement.

Features & Specifications

- CGA inlet fitting
- Integral inlet filter
- 2" diameter brass gauges
- PTFE-lined stainless steel diaphragm
- Maximum inlet pressure: 3600 psig
- Outlet pressure ranges: 0–10 psig, 0–25 psig, 0–50 psig, 0–100 psig, 0–250, 0–500 and 0–750 psig
- Fluid media; non-corrosive gases
- Operating temperatures: –40° F to +175° F (–40° C to +80° C)
- Cv flow coefficients: 0.025, 0.06, 0.20

GO Regulator

405 Centura Court • PO Box 4866 (29305) • Spartanburg, SC 29303

Phone (864) 574-7966 Fax (864) 574-5608

www.goreg.com • sales@goreg.com

Boiswood
GAS AND LIQUID CONTROL TECHNOLOGIES

Pressure & Vacuum

Flow

Level & Temperature

Tube & Fittings

HVACR

Custom Services

pressure regulators

CYL-1 Series

How to Order

Standard items in bold

C1 - 2 F 1 1 A 3 C 1

CGA Fitting
0 0 0

1

BODY MATERIAL

2 Brass

PORT CONFIGURATION

F Standard

For more port configurations, see page 19.

PROCESS PORT TYPES
(GAUGE PORT TYPES, IF SPECIFIED)

1 1/4" FNPT (1/4" FNPT gauge ports)

4 3/8" FNPT (1/4" FNPT gauge ports)

DIAPHRAGM TYPE

1 Standard diaphragm

2 Diaphragm-attached poppet

3 Self-relieving

4 Vacuum-assist spring, standard diaphragm

5 Vacuum-assist spring, diaphragm-attached poppet

8 Tefzel® ring/stainless steel

SEAT MATERIAL

A Tefzel®

B CF PTFE

C Polyimide

H PCTFE (formerly Kel-F® 81)

I High density PTFE

Q PEEK™

GAUGES

1 Include gauges

2 Omit gauges

3 Customer-supplied

CGA FITTING

Use '000' to omit CGA

Use 'CUS' for customer-supplied CGA

CAP ASSEMBLY

1 Standard

4 Panel mount

OUTPUT RANGE

C 0-10 psig

D 0-25 psig

E 0-50 psig

G 0-100 psig

I 0-250 psig

J 0-500 psig

W 0-750 psig

FLOW COEFFICIENT (Cv)

3 0.06

5 0.2

C 0.025


Maximum Temperature & Operating Inlet Pressures

SEAT MATERIAL	MAXIMUM TEMPERATURE		MAXIMUM OPERATING INLET PRESSURE
Tefzel®	150° F (66° C)	@	3600 psig (24.82 MPa)
High density PTFE	150° F (66° C)	@	3600 psig (24.82 MPa)
PCTFE (formerly Kel-F® 81)	175° F (80° C)	@	3600 psig (24.82 MPa)
Polyimide	175° F (80° C)	@	3600 psig (24.82 MPa)
PEEK™	175° F (80° C)	@	3600 psig (24.82 MPa)


NOTE: The choices above represent an abbreviated list of the more commonly ordered options. For a complete listing of all available options, please see the Selection Wizard on the GO website at www.goreg.com or contact the factory.

Outline & Mounting Dimensions

Weight = 1.9 lbs (0.86 kg)

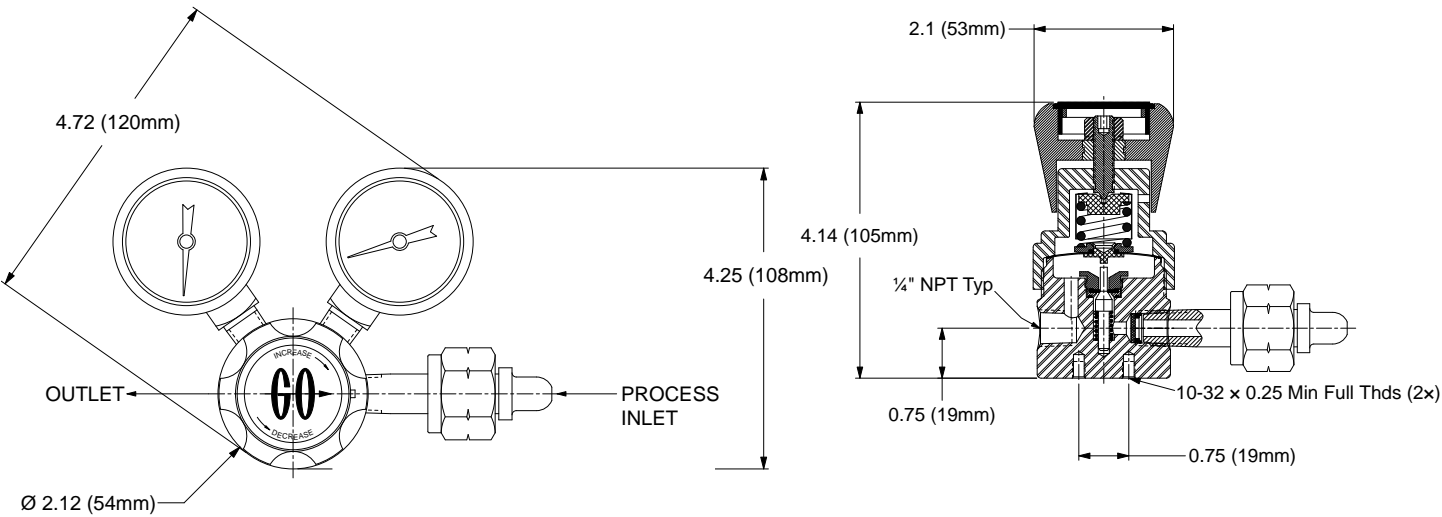

Tefzel® is a registered trademark of the DuPont Company.
Kel-F® is a registered trademark of 3M Company.
PEEK™ is a trademark of Victrex PLC.

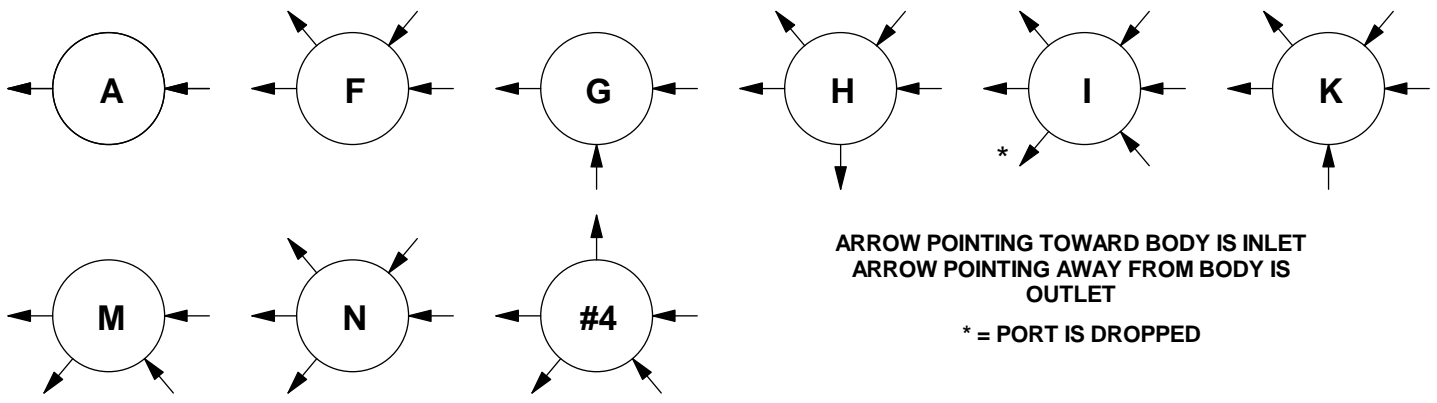

DUAL STAGE PRESSURE REDUCING PORTING CONFIGURATIONS

